


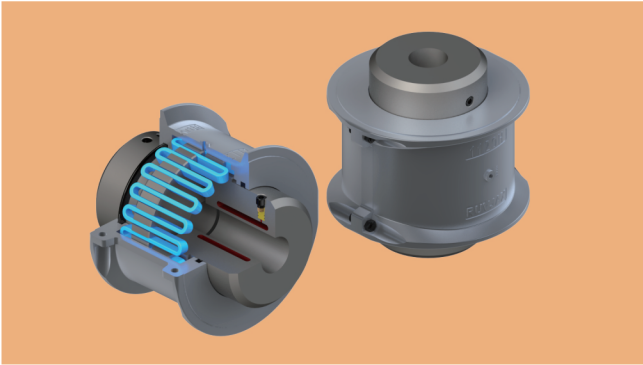

- 采用液压胀紧方式，便于快速装拆
- 平键传动
- 油脂润滑
- 扭转弹性
- 缓解冲击，减小振动
- 水平中开型外壳，安装方便
- 分片式弹簧，可不移动驱动及被驱动设备更换弹簧
- 弹簧的最大扭矩是额定扭矩的2倍

注：为表达清楚，液压油腔采用红色表示。




图07.23

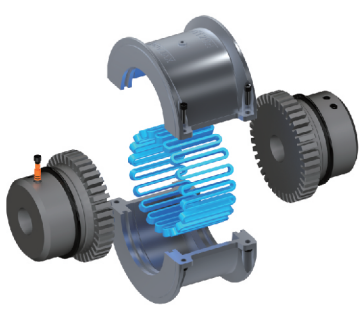




表07.11

型号	额定扭矩	最大转速	最大孔径	OD	OAL	G	LTB	HD	润滑剂质量
-	N.m	rpm	mm	mm	mm	mm	mm	mm	kg
1080H-HYL	2050	3600	60	194.0	180.8	3.0	88.9	104.8	0.17
1090H-HYL	3730	3600	70	213.0	199.8	3.0	98.4	123.8	0.25
1100H-HYL	6280	2440	80	250.0	245.7	4.5	120.6	142	0.43
1110H-HYL	9320	2250	100	270.0	258.5	4.5	127	160.3	0.51
1120H-HYL	13700	2025	110	308.0	304.4	6.0	149.2	179.4	0.74
1130H-HYL	19900	1800	140	346.0	329.8	6.0	161.9	217.5	0.91
1140H-HYL	28600	1650	160	384.0	371.6	6.0	182.8	254	1.14
1150H-HYL	39800	1500	170	453.1	371.8	6.0	182.9	269.2	1.95
1160H-HYL	55900	1350	200	501.4	402.2	6.0	198.1	304.8	2.81
1170H-HYL	74600	1225	220	566.4	437.8	6.0	215.9	355.6	3.49
1180H-HYL	103000	1100	260	629.9	483.6	6.0	238.8	393.7	3.76
1190H-HYL	137000	1050	300	675.6	524.2	6.0	259.1	436.9	4.40
1200H-HYL	186000	900	340	756.9	564.8	6.0	279.4	497.8	5.62
1210H-HYL	249000	820	360	844.5	622.3	12.7	304.8	533.4	10.50
1220H-HYL	336000	730	380	920.7	662.9	12.7	325.1	571.5	16.10
1230H-HYL	435000	680	420	1003.4	704.2	13.0	345.6	610.3	24.00
1240H-HYL	559000	630	440	1086.9	749.6	13.0	368.3	647.8	33.80
1250H-HYL	746000	580	480	1181.2	816.4	13.0	401.7	710.6	50.10
1260H-HYL	932000	540	500	1260.8	877.2	13.0	432.1	762.2	67.20

- HYL系列液压胀紧快速装拆联轴器需配合高压油枪使用，安装请参见乐兆相应安装指导。
- 最大扭矩为额定扭矩的2倍。