


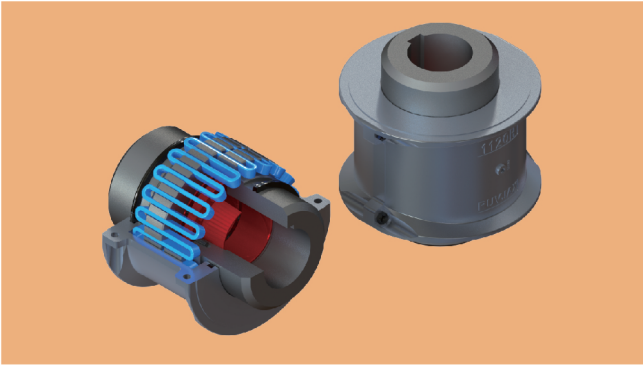

- 采用锥套胀紧，便于快速装拆
- 平键传动
- 油脂润滑
- 扭转弹性
- 缓解冲击，减小振动
- 水平中型外壳，安装方便
- 分片式弹簧，可不移动驱动及被驱动设备更换弹簧
- 弹簧的最大扭矩是额定扭矩的2倍

注：为表达清楚，锥套采用红色表示，实际产品为金属本色。

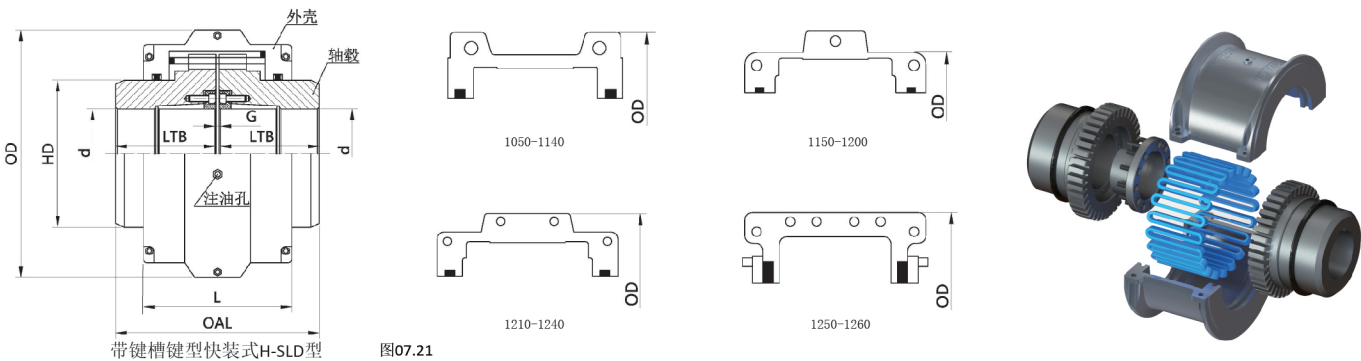


图07.21

表07.09

型号	额定扭矩	最大转速	最大孔径d	OD	OAL	G	LTB	HD	L	润滑剂质量
-	Nm	rpm	mm	mm	mm	mm	mm	mm	mm	kg
1050H-SLD	435	4500	45	138.0	123.6	3.0	60.3	66.7	79.5	0.07
1060H-SLD	684	4350	50	150.5	130.0	3.0	63.5	76.2	92.0	0.09
1070H-SLD	994	4125	55	161.9	155.4	3.0	76.2	87.3	95.0	0.11
1080H-SLD	2050	3600	60	194.0	180.8	3.0	88.9	104.8	116.0	0.17
1090H-SLD	3730	3600	65	213.0	199.8	3.0	98.4	123.8	122.0	0.25
1100H-SLD	6280	2440	80	250.0	245.7	4.5	120.6	142.0	155.5	0.43
1110H-SLD	9320	2250	95	270.0	258.5	4.5	127.0	160.3	161.5	0.51
1120H-SLD	13700	2025	105	308.0	304.4	6.0	149.2	179.4	191.5	0.74
1130H-SLD	19900	1800	125	346.0	329.8	6.0	161.9	217.5	195.0	0.91
1140H-SLD	28600	1650	150	384.0	371.6	6.0	182.8	254.0	201.0	1.14
1150H-SLD	39800	1500	170	453.1	371.8	6.0	182.9	269.2	271.3	1.95
1160H-SLD	55900	1350	200	501.4	402.2	6.0	198.1	304.8	278.9	2.81
1170H-SLD	74600	1225	240	566.4	437.8	6.0	215.9	355.6	304.3	3.49
1180H-SLD	103000	1100	260	629.9	483.6	6.0	238.8	393.7	321.1	3.76
1190H-SLD	137000	1050	300	675.6	524.2	6.0	259.1	436.9	325.1	4.40
1200H-SLD	186000	900	320	756.9	564.8	6.0	279.4	497.8	355.6	5.62
1210H-SLD	249000	820	360	844.5	622.3	12.7	304.8	533.4	431.8	10.50
1220H-SLD	336000	730	380	920.7	662.9	12.7	325.1	571.5	490.2	16.10
1230H-SLD	435000	680	400	1003.4	704.2	13.0	345.6	610.3	546.1	24.00
1240H-SLD	559000	630	420	1086.9	749.6	13.0	368.3	647.8	647.7	33.80
1250H-SLD	746000	580	450	1181.2	816.4	13.0	401.7	710.6	698.5	50.10
1260H-SLD	932000	540	480	1260.8	877.2	13.0	432.1	762.2	762.0	67.20

- 最大扭矩为额定扭矩的2倍。
- 快装型产品建议配轴的公差为h8，更详尽信息请咨询乐兆传动。