


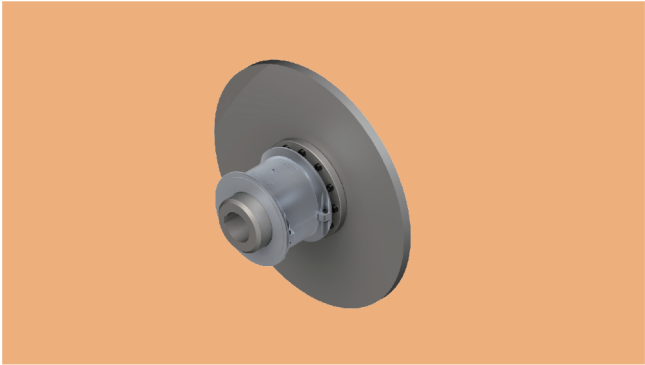

- 配备制动盘
- 可选择多种轴毂联接方式
- 油脂润滑
- 扭转弹性
- 缓解冲击，减小振动
- 径向剖分式外壳，安装方便
- 分片式弹簧，可不移动驱动及被驱动设备更换弹簧
- 弹簧的最大扭矩是额定扭矩的2倍

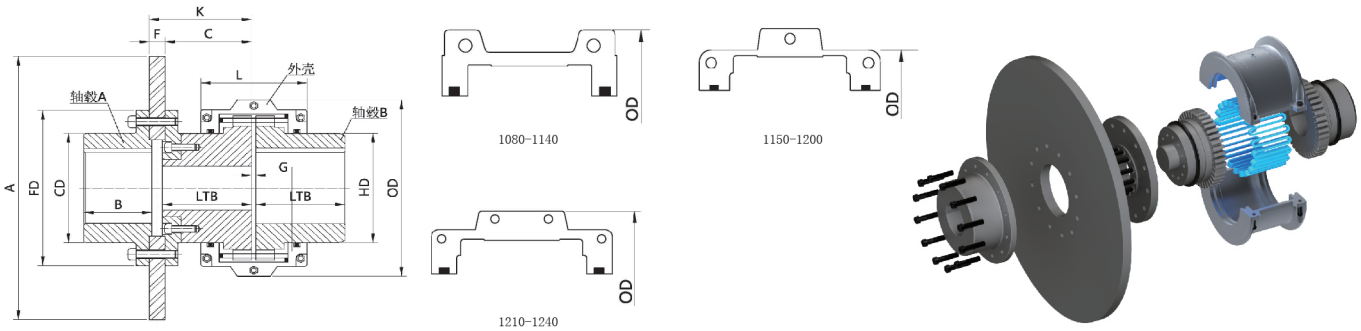


图07.25

表07.13

规格	额定制 动扭矩	制动盘规格 A x F		允许转 速	轴毂孔径 mm		B	FD	CD	HD	OD	C	K	L	LTB	G	润滑剂 质量
		英制	公制		轴毂A	轴毂B											
-	Nm	mm	mm	rpm	轴毂A	轴毂B	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
1080H-TBD	637	305x6.4	355x30	2850	95	78	88.9	177.8	122	104.8	194.0	85.9	115.9	116.0	88.9	3.0	0.17
1090H-TBD	1084	407x12.7	450x30	2700	110	95	101.6	209.6	142	123.8	213.0	95.4	125.4	122.0	98.4	3.0	0.25
1100H-TBD	1897	407x12.7	450x30	2400	130	107	90.4	250.8	171	142.1	250.0	117.6	147.6	155.5	120.6	4.5	0.43
1110H-TBD	2846	458x12.7	450x30	2250	150	117	104.1	276.2	196	160.3	270.0	124.0	154.0	161.5	127.0	4.5	0.51
1120H-TBD	4336	508x12.7	500x30	2025	170	136	119.4	319.1	225	179.4	308.0	146.2	176.2	191.5	149.2	6.0	0.74
1130H-TBD	6098	559x12.7	500x30	1800	190	165	134.6	346.1	248	217.5	346.0	158.9	188.9	195.0	161.9	6.0	0.91
1140H-TBD	8808	610x12.7	630x30	1650	210	184	152.4	358.8	282	254.0	384.0	179.8	209.8	201.0	182.8	6.0	1.14
1150H-TBD	12195	763x12.7	800x30	1500	270	203	172.7	425.4	338	269.2	453.1	179.9	209.9	271.3	182.9	6.0	1.95
1160H-TBD	16938	914x12.7	900x30	1350	290	228	186.4	457.2	368	304.8	501.4	195.1	225.1	278.9	198.1	6.0	2.81
1170H-TBD	22653	-	1000x30	1225	340	279	220.2	527.0	420	355.6	566.4	212.9	242.9	304.3	215.9	6.0	3.49
1180H-TBD	31386	-	1200x30	1100	340	311	248.9	590.6	451	393.7	629.9	235.8	265.8	321.1	238.8	6.0	3.76
1190H-TBD	41778	-	1200x30	1050	380	339	275.8	660.4	508	436.9	675.6	256.1	286.1	325.1	259.1	6.0	4.40
1200H-TBD	56712	-	1600x30	900	400	361	305.3	711.2	538	497.8	756.9	276.4	306.4	355.6	279.4	6.0	5.62
1210H-TBD	76347	-	1600x30	820	420	390	326.4	762.0	565	533.4	844.5	301.8	331.8	431.8	304.8	12.7	10.50

- 最大扭矩为额定扭矩的2倍。
- 更多尺寸更多规格，请咨询乐兆传动。