


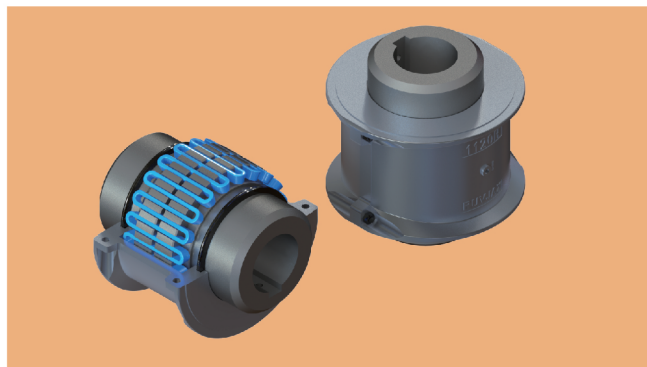

- 水平中开型外壳
- 平键传动
- 油脂润滑
- 扭转弹性
- 缓解冲击，减小振动
- 分片式弹簧，可不移动驱动及被驱动设备更换弹簧
- 弹簧的最大扭矩是额定扭矩的2倍

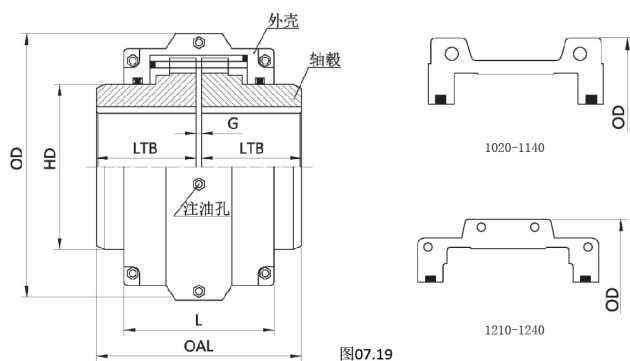


图07.19





表07.07

型号	额定扭矩	最大转速	最小开孔	最大开孔	OD	OAL	G	LTB	HD	L	未开孔重量	润滑剂质量
-	Nm	rpm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
1020H	52	4500	12.0	30.0	101.6	98.0	3.0	47.5	39.7	66.5	1.9	0.03
1030H	149	4500	12.0	35.0	110.0	98.0	3.0	47.5	49.2	68.3	2.6	0.04
1040H	249	4500	12.0	43.0	117.5	104.6	3.0	50.8	57.1	70.0	3.4	0.05
1050H	435	4500	12.0	50.0	138.0	123.6	3.0	60.3	66.7	79.5	5.4	0.07
1060H	684	4350	19.0	55.0	150.5	130.0	3.0	63.5	76.2	92.0	7.3	0.09
1070H	994	4125	19.0	65.0	161.9	155.4	3.0	76.2	87.3	95.0	10.0	0.11
1080H	2050	3600	27.0	78.0	194.0	180.8	3.0	88.9	104.8	116.0	18.0	0.17
1090H	3730	3600	27.0	95.0	213.0	199.8	3.0	98.4	123.8	122.0	25.0	0.25
1100H	6280	2440	41.0	107.0	250.0	245.7	4.5	120.6	142.0	155.5	42.0	0.43
1110H	9320	2250	41.0	117.0	270.0	258.5	4.5	127.0	160.3	161.5	54.0	0.51
1120H	13700	2025	60.0	136.0	308.0	304.4	6.0	149.2	179.4	191.5	81.0	0.74
1130H	19900	1800	67.0	165.0	346.0	329.8	6.0	161.9	217.5	195.0	121.0	0.91
1140H	28600	1650	67.0	184.0	384.0	371.6	6.0	182.8	254.0	201.0	178.0	1.14
1150H	39800	1500	108.0	203.0	453.1	371.8	6.0	182.9	269.2	271.3	234.0	1.95
1160H	55900	1350	120.7	228.0	501.4	402.2	6.0	198.1	304.8	278.9	317.0	2.81
1170H	74600	1225	133.4	279.0	566.4	437.8	6.0	215.9	355.6	304.3	448.0	3.49
1180H	103000	1100	152.4	311.0	629.9	483.6	6.0	238.8	393.7	321.1	619.0	3.76
1190H	137000	1050	152.4	339.0	675.6	524.2	6.0	259.1	436.9	325.1	776.0	4.40
1200H	186000	900	177.8	361.0	756.9	564.8	6.0	279.4	497.8	355.6	1058.0	5.62
1210H	249000	820	178.0	390.0	844.5	622.3	12.7	304.8	533.4	431.8	1424.0	10.50
1220H	336000	730	203.0	420.0	920.7	662.9	12.7	325.1	571.5	490.2	1785.0	16.10
1230H	435000	680	260.0	450.0	1003.4	703.8	13.0	345.4	619.6	546.1	2267.0	24.00
1240H	559000	630	340.0	480.0	1087.1	749.6	13.0	368.3	647.8	647.7	2950.0	33.80
1250H	746000	580	370.0	490.0	1181.1	815.6	13.0	401.3	711.2	698.5	3833.0	50.10
1260H	932000	540	390.0	510.0	1260.9	876.6	13.0	431.8	762.0	762.0	4682.0	67.20

- 最大扭矩为额定扭矩的2倍。
- 最大开孔仅指标准圆柱孔及平键槽（GB/T 1095-2003）形式。