


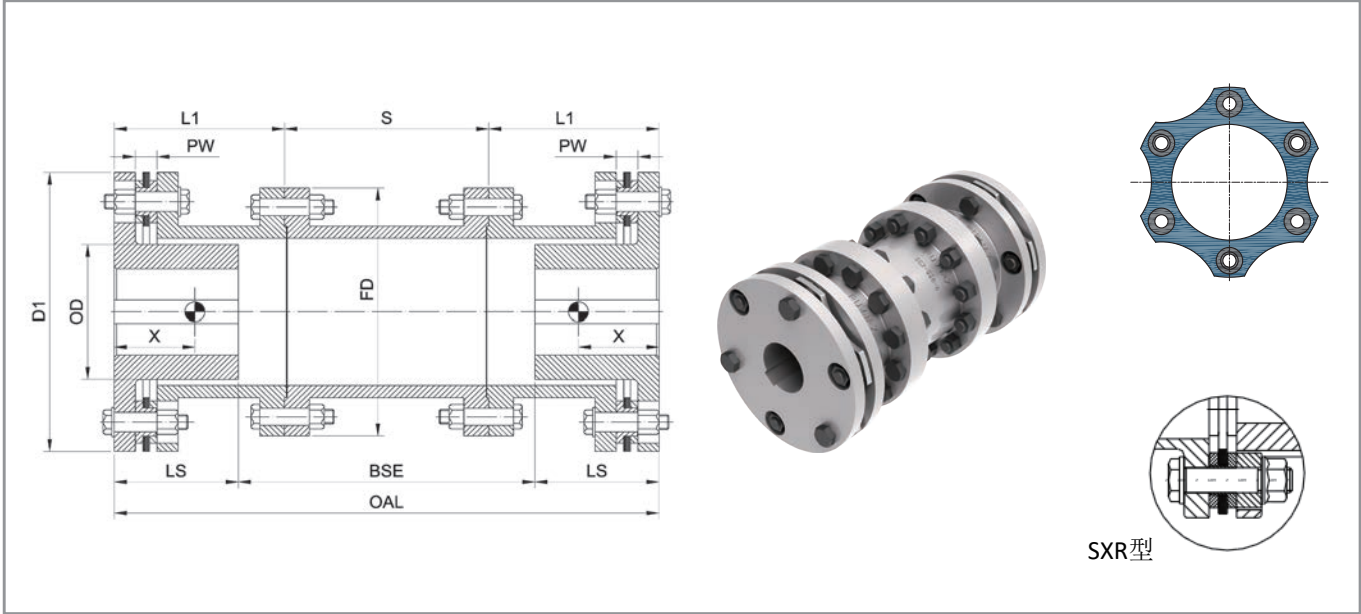

规格	额定扭矩	最大扭矩	最大转速	最大开孔	D1	OD	FD	LS	L1	S	PW	BSE	OAL	重心 X	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgm ²	kg
90-6	300	600	15920	31	90	45	85	40	50	70	7.5	90	170	22.4	0.00207	2.2
110-6	650	1300	13020	39	110	59	105	50	58	75	8.4	91	191	34.4	0.00588	4.1
132-6	1500	3000	10850	50	132	77	116	60	66	85	8.4	97	217	51.9	0.01219	6.3
158-6	2000	4000	9070	60	158	92	152	70	81	110	11.2	132	272	51.0	0.03545	12.1
185-6	4000	8000	7740	68	185	106	178	80	96	115	14.0	147	307	57.2	0.07810	19.6
202-6	5000	10000	7090	75	202	116	213	90	110	135	15.5	175	355	57.3	0.14694	28.3
228-6	8000	16000	6280	85	228	133	225	100	120	135	17.5	175	375	70.3	0.24491	39.4
255-6	12500	25000	5620	95	256	147	240	115	130	135	20.5	165	395	87.0	0.41128	54.3
278-6	14200	28400	5150	105	278	168	279	125	150	175	21.2	225	475	89.7	0.70374	75.4
302-6	20000	40000	4740	115	302	182	318	135	160	175	24.4	225	495	91.3	1.14221	98.7
325-6	25000	50000	4410	125	325	201	346	145	165	175	26.0	215	505	106.1	1.62912	121.0
345-6	31000	62000	4150	130	345	212	389	155	185	220	28.2	280	590	99.3	2.53340	158.0
380-6	42300	84600	3770	145	380	230	425	170	200	220	32.0	280	620	107.9	4.03564	207.7
410-6	57100	114200	3490	155	410	246	457	185	200	180	33.2	210	580	127.0	6.02815	264.9
440-6	73500	147000	3260	160	440	254	470	195	215	210	36.4	250	640	126.9	8.22376	325.9
475-6	92000	184000	3020	165	475	282	480	210	220	220	38.2	240	660	160.7	10.70571	394.9
505-6	117000	234000	2840	170	505	296	495	230	230	230	42.0	230	690	185.6	13.67041	465.8
540-6	145000	290000	2650	165	540	311	527	240	245	200	46.0	210	690	196.7	19.15002	579.7
570-6	175000	350000	2510	170	570	326	556	250	255	235	51.6	245	745	198.9	26.01385	705.1
605-6	210000	420000	2370	179	605	342	588	265	270	250	53.2	260	790	208.8	35.14202	845.9
635-6	248000	496000	2260	188	635	354	628	280	285	260	60.8	270	830	212.1	47.39813	1017.3
675-6	306000	612000	2120	199	675	378	663	300	305	280	65.2	290	890	230.1	65.66155	1249.2
700-6	349000	698000	2050	207	700	394	685	315	320	300	68.8	310	940	239.3	81.31579	1433.3
730-6	413000	826000	1960	218	730	420	716	330	335	310	71.2	320	980	258.8	100.25385	1627.5
760-6	473000	946000	1880	228	760	436	745	350	355	335	72.8	345	1045	270.8	126.06683	1881.7

• SCX型设计用于减小弯矩，扭转刚度请咨询乐兆传动。