


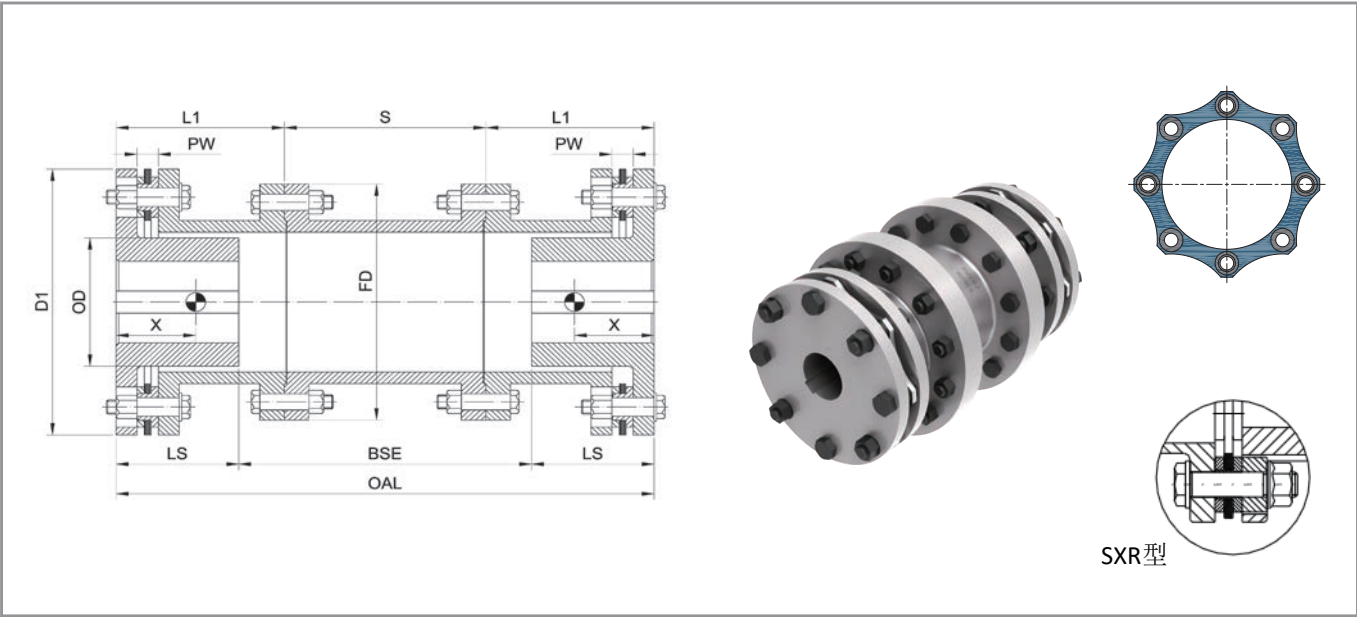

规格	额定扭矩	最大扭矩	最大转速	最大开孔	D1	OD	FD	LS	L1	S	PW	BSE	OAL	重心 X	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgm ²	kg
202-8	8000	16000	9600	75	202	116	213	90	110	135	15.5	175	355	55.5	0.14597	28.5
228-8	11500	23000	8500	85	228	133	225	100	120	135	17.5	175	375	69.4	0.23117	39.5
255-8	15000	30000	7700	95	256	147	240	115	130	135	20.5	165	395	86.6	0.39861	54.5
278-8	20000	40000	7000	105	278	168	279	125	150	175	21.2	225	475	90.0	0.68910	75.6
302-8	30000	60000	6400	115	302	182	318	135	160	175	24.4	225	495	90.7	1.12220	99.6
325-8	37000	74000	6000	125	325	201	346	145	165	175	26.0	215	505	105.5	1.56171	121.4
345-8	46000	92000	5500	130	345	212	389	155	185	220	28.2	280	590	97.7	2.49611	158.6
380-8	63000	126000	5100	145	380	230	425	170	200	220	32.0	280	620	107.2	3.96793	208.1
410-8	86000	172000	4700	155	410	244	457	185	200	180	33.2	210	580	125.0	5.85853	266.3
440-8	110000	220000	4350	160	440	250	470	195	215	210	36.4	250	640	121.0	8.24828	327.7
475-8	138000	276000	4200	165	475	279	480	210	220	220	38.2	240	660	156.1	10.71862	396.6
505-8	175000	350000	3800	170	505	296	495	230	230	230	42.0	230	690	184.8	13.53348	467.4
540-8	220000	440000	3600	165	540	311	527	240	245	200	46.0	210	690	197.4	18.37856	580.7
570-8	259000	518000	3400	170	570	326	556	250	255	235	51.6	245	745	199.9	25.12861	708.5
605-8	315000	630000	3200	179	605	342	588	265	270	250	53.2	260	790	209.7	34.09663	847.6
635-8	383000	766000	3100	188	635	354	628	280	285	260	60.8	270	830	212.4	45.96811	1019.2
675-8	454000	908000	2900	199	675	378	663	300	305	280	65.2	290	890	230.4	63.76836	1253.4
700-8	528000	1056000	2800	207	700	394	685	315	320	300	68.8	310	940	241.4	78.97331	1438.8
730-8	608000	1216000	2700	218	730	420	716	330	335	310	71.2	320	980	254.6	100.34982	1687.3
760-8	700000	1400000	2600	228	760	436	745	350	355	335	72.8	345	1045	271.4	121.74299	1886.9
810-8	885000	1770000	2400	235	810	454	795	365	370	360	76.8	370	1100	275.5	163.70776	2191.7
875-8	1161000	2322000	2200	250	875	496	860	390	395	380	85.6	390	1170	301.4	233.03948	2741.8
935-8	1460000	2920000	2000	260	935	524	915	410	420	400	89.6	420	1240	311.0	320.00349	3298.4
1000-8	1836000	3672000	1800	275	1000	566	980	450	460	440	94.4	460	1360	350.7	441.13631	4045.2
1060-8	2271000	4542000	1500	295	1060	608	1040	490	500	480	99.2	490	1480	387.4	601.93620	4901.3

• SCX型设计用于减小弯矩，扭转刚度请咨询乐兆传动。