


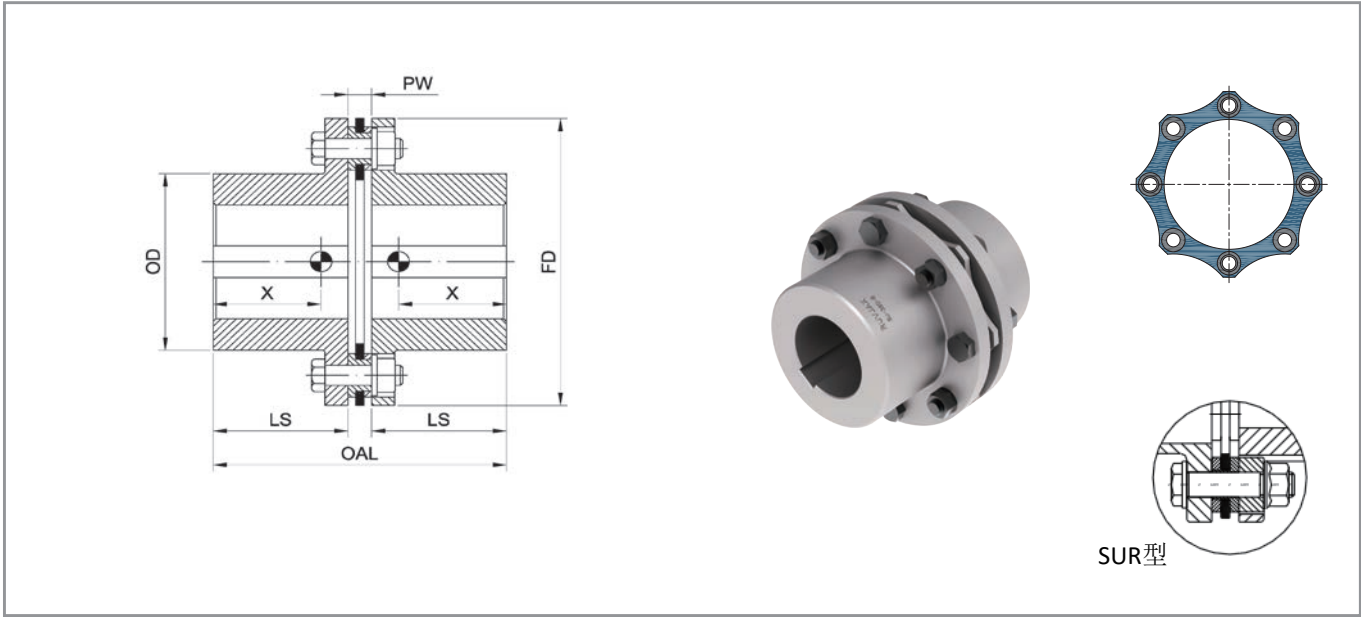

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	LS	PW	OAL	重心 X	扭转刚度	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	MNm/rad	kgm ²	
202-8	8000	16000	9600	95	202	132	90	15.5	195.5	55.2	3.306	0.0056	14.5
228-8	11500	23000	8500	107	228	150	100	17.5	217.5	61.1	4.513	0.1045	21.3
255-8	15000	30000	7700	117	256	165	115	20.5	250.5	70.8	5.719	0.1857	30.7
278-8	20000	40000	7000	131	278	188	125	21.2	271.2	74.8	7.402	0.3066	41.3
302-8	30000	60000	6400	145	302	205	135	24.4	294.4	80.8	8.951	0.4570	61.7
325-8	37000	74000	6000	156	325	225	145	26.0	316.0	85.3	10.758	0.6852	67.8
345-8	46000	92000	5500	165	345	238	155	28.2	338.2	91.4	13.071	0.9253	81.1
380-8	63000	126000	5100	178	380	260	170	32.0	372.0	100.4	20.086	1.4865	109.7
410-8	86000	172000	4700	192	410	280	185	33.2	403.2	109.6	27.010	2.2076	147.3
440-8	110000	220000	4350	200	440	292	195	36.4	426.4	117.6	29.983	3.0172	169.9
475-8	138000	276000	4200	220	475	323	210	38.2	458.2	124.9	39.731	4.5658	219.6
505-8	175000	350000	3800	230	505	345	230	42.0	502.0	135.7	46.061	6.4632	277.3
540-8	220000	440000	3600	240	540	370	240	46.0	526.0	141.6	60.254	9.2203	346.5
570-8	259000	518000	3400	250	570	390	250	51.6	551.6	148.1	+	12.1752	414.2
605-8	315000	630000	3200	270	605	410	265	53.2	583.2	159.0	+	16.0426	480.6
635-8	383000	766000	3100	280	635	430	280	60.8	620.8	167.5	+	20.7413	573.6
675-8	454000	908000	2900	290	675	460	300	65.2	665.2	178.5	+	29.4350	726.7
700-8	528000	1056000	2800	300	700	480	315	68.8	698.8	187.2	+	36.7438	834.2
730-8	608000	1216000	2700	315	730	500	330	71.2	731.2	196.6	+	45.4324	971.8
760-8	700000	1400000	2600	330	760	520	350	72.8	772.8	208.1	+	55.2353	1108.8
810-8	885000	1770000	2400	350	810	550	365	76.8	806.8	218.2	+	73.3346	1282.6
875-8	1161000	2322000	2200	375	875	600	390	85.6	865.6	230.6	+	107.4807	1603.5
935-8	1460000	2920000	2000	400	935	640	410	89.6	909.6	242.5	+	147.0171	1911.6
1000-8	1836000	3672000	1800	430	1000	690	450	94.4	994.4	263.4	+	208.8359	2377.8
1060-8	2271000	4542000	1500	460	1060	740	490	99.2	1079.2	284.9	+	292.8130	2946.8

• 表中所列扭转刚度为标准轴毂尺寸时整套产品扭转刚度，如轴毂长度LS发生变化，整体扭转刚度需重新计算，其中膜片扭转刚度参见第12页。

+ 请咨询乐兆传动。