


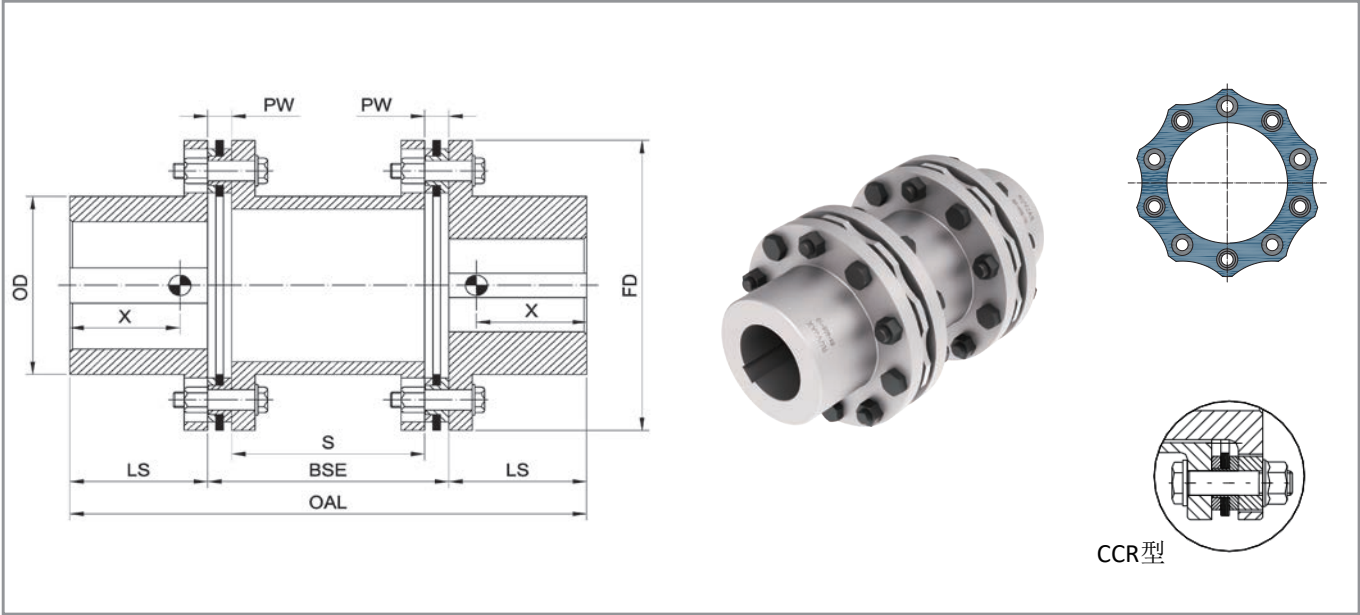

规格	额定 扭矩	最大 扭矩	最大 转速	最大 开孔	FD	OD	LS	中间段每米			BSE	S	PW	OAL	重心 X	转动 惯量 J	重量
								质量	扭转 刚度	转动 惯量							
								kg	MNm /rad	kgm ²							
505-10	219000	438000	3800	230	505	345	230	211.74	54.951	5.3917	394	310.0	42.0	854	204.6	12.0448	410.5
540-10	274000	548000	3600	240	540	370	240	251.55	74.668	7.3263	416	324.0	46.0	896	213.6	16.8468	522.6
570-10	323000	646000	3400	250	570	385	250	286.47	91.232	8.9516	450	346.8	51.6	950	227.4	21.8662	633.7
605-10	394000	788000	3200	270	605	400	265	339.24	114.519	11.2364	474	367.6	53.2	1004	246.6	28.7761	754.3
635-10	480000	960000	3100	280	635	415	280	402.57	143.168	14.0475	521	399.4	60.8	1081	268.4	37.9030	916.5
675-10	570000	1140000	2900	290	675	435	300	458.11	177.505	17.4166	558	427.6	65.2	1158	288.9	51.4629	1158.2
700-10	660000	1320000	2800	300	700	450	315	527.36	214.629	21.0591	595	457.4	68.8	1225	306.7	64.4905	1341.6
730-10	760000	1520000	2700	315	730	470	330	580.56	257.115	25.2278	610	467.6	71.2	1270	319.5	81.6253	1568.7
760-10	870000	1740000	2600	330	760	495	350	625.07	309.502	30.3680	642	496.4	72.8	1342	333.7	101.4614	1794.8
810-10	1139000	2278000	2400	350	810	540	365	751.29	441.559	43.3253	665	511.4	76.8	1395	344.5	142.2839	2003.6
875-10	1493000	2986000	2200	375	875	590	390	597.68	629.672	61.7827	712	540.8	85.6	1492	365.1	209.2678	2527.8
935-10	1879000	3758000	2000	400	935	630	410	1073.49	847.473	83.1531	746	566.8	89.6	1566	386.4	289.9288	3097.4
1000-10	2363000	4726000	1800	430	1000	680	450	1247.26	1148.023	112.6428	817	628.2	94.4	1717	422.1	408.7328	3842.5
1060-10	2922000	5844000	1500	460	1060	730	490	1282.40	1401.414	137.5051	880	681.6	99.2	1860	448.2	551.7870	4540.1
1120-10	3560000	7120000	1200	470	1120	775	540	1461.29	1795.052	176.1285	940	720.0	110.0	2020	491.0	747.1419	5478.5
1185-10	4337000	8674000	1000	505	1185	825	580	1663.07	2312.570	226.9068	1000	768.8	115.6	2160	532.4	1028.8486	6665.7
1245-10	5158000	10316000	900	530	1245	890	630	1845.27	3020.568	296.3747	1075	834.2	120.4	2335	574.6	1438.0776	8311.4
1320-10	6322000	12644000	800	555	1320	950	690	2096.23	3912.313	383.8717	1150	896.4	126.8	2530	636.2	2024.0426	1065.7

• 表中所列扭转刚度为标准尺寸时整套产品扭转刚度，如轴毂长度LS及中间段长度S发生变化，整体扭转刚度需重新计算，其中膜片扭转刚度参见第11页。