


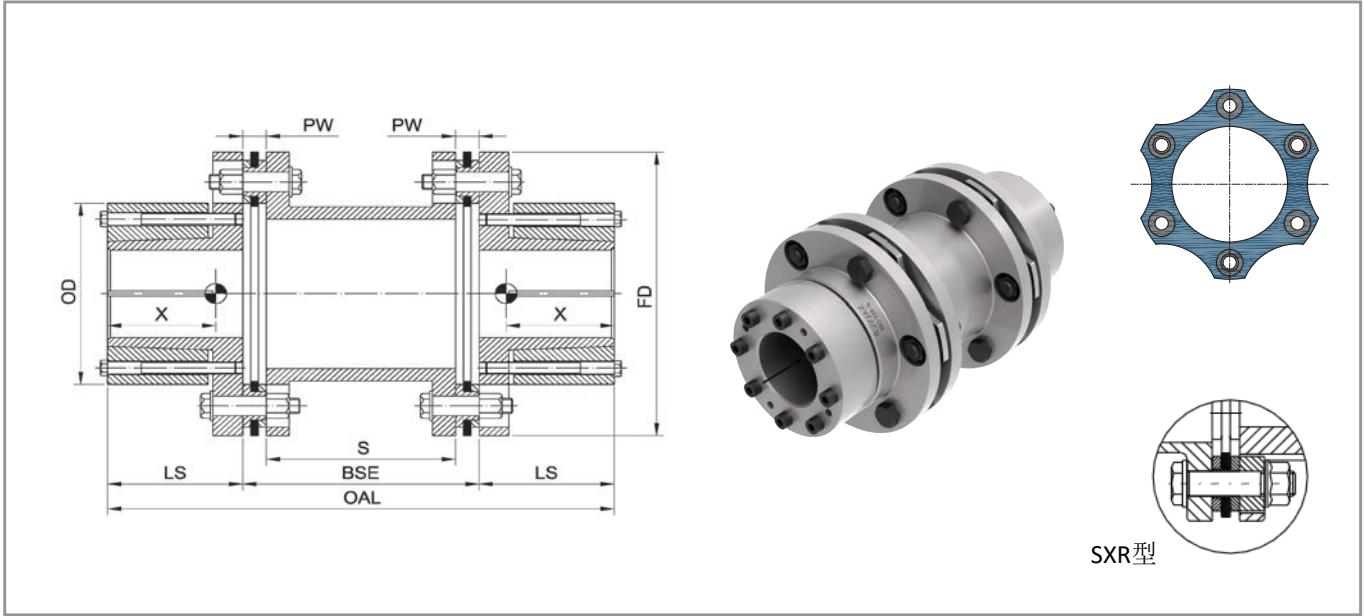

规格	额定 扭矩	最大 扭矩	最大 转速	最大 开孔	FD	OD	LS	BSE	S	PW	OAL	重心 X	扭转刚度	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	MNm/rad	kgm ²	kg
90-6	300	600	15920	20	90	60	40	71	56.0	7.5	151	34.7	0.108	0.0024	2.8
110-6	650	1300	13020	25	110	85	50	88	71.2	8.4	188	39.0	0.287	0.0075	5.9
132-6	1500	3000	10850	30	132	110	60	108	91.2	8.4	228	43.3	0.390	0.0211	10.8
158-6	2000	4000	9070	40	158	130	70	124	101.6	11.2	264	51.2	0.897	0.0504	18.4
185-6	4000	8000	7740	45	185	140	80	140	112.0	14.0	300	62.1	0.858	0.0942	25.9
202-6	5000	10000	7090	50	202	145	90	158	127.0	15.5	338	71.4	1.006	0.1378	32.3
228-6	8000	16000	6280	60	228	150	100	174	139.0	17.5	374	84.4	1.653	0.2283	42.0
255-6	12500	25000	5620	70	256	160	115	196	155.0	20.5	426	99.9	1.709	0.3909	57.0
278-6	14200	28400	5150	80	278	180	125	218	175.6	21.2	468	106.8	2.793	0.6030	74.0
302-6	20000	40000	4740	90	302	180	135	234	185.2	24.4	504	121.9	2.907	0.8240	84.6
325-6	25000	50000	4410	100	325	225	145	254	202.0	26.0	544	119.8	6.235	1.3535	120.4
345-6	31000	62000	4150	110	345	245	155	270	213.6	28.2	580	127.2	7.669	1.8976	148.4
380-6	42300	84600	3770	120	380	254	170	296	232.0	32.0	636	145.2	9.554	2.8545	186.2
410-6	57100	114200	3490	130	410	280	185	320	253.6	33.2	690	157.5	11.494	4.4783	249.0
440-6	73500	147000	3260	140	440	300	195	334	261.2	36.4	724	168.3	13.273	6.4615	309.5
475-6	92000	184000	3020	150	475	330	210	358	281.6	38.2	778	178.4	18.190	9.6151	395.8
505-6	117000	234000	2840	160	505	355	230	394	310.0	42.0	854	194.3	20.322	13.3880	490.9
540-6	145000	290000	2650	165	540	380	240	416	324.0	46.0	896	206.2	24.364	19.2030	616.2
570-6	175000	350000	2510	175	570	400	250	450	346.8	51.6	950	219.5	29.172	25.7602	736.6
605-6	210000	420000	2370	185	605	420	265	474	367.6	53.2	1004	233.9	34.662	34.6148	878.4
635-6	248000	496000	2260	190	635	440	280	521	399.4	60.8	1081	251.4	40.844	45.7124	1058.7
675-6	306000	612000	2120	200	675	470	300	558	427.6	65.2	1158	269.4	47.476	64.2382	1311.2
700-6	349000	698000	2050	210	700	490	315	595	457.4	68.8	1225	284.5	+	79.8892	1502.1
730-6	413000	826000	1960	220	730	520	330	610	467.6	71.2	1270	293.7	+	100.1225	1723.9
760-6	473000	946000	1880	230	760	540	350	642	496.4	72.8	1342	311.4	+	125.2854	1985.2

• 表中所列扭转刚度为标准尺寸时整套产品扭转刚度，如轴毂长度LS及中间段长度S发生变化，整体扭转刚度需重新计算，其中膜片扭转刚度参见第11页，中间段扭转刚度参见第15页。
+ 请咨询乐兆传动。