


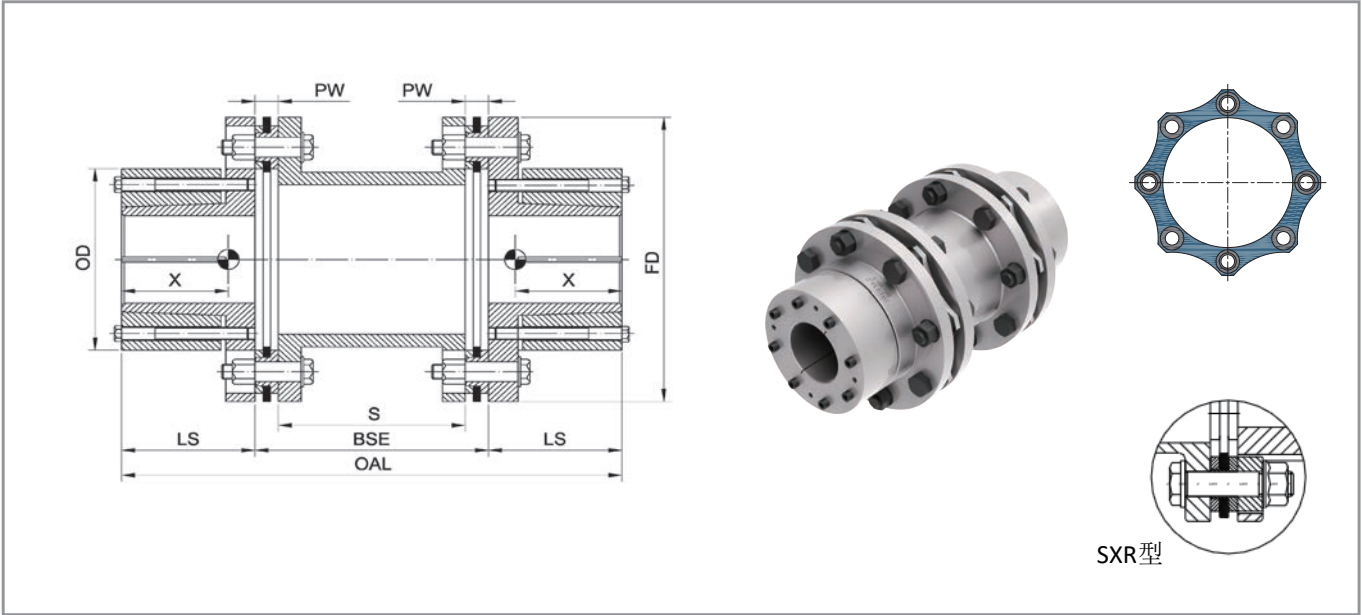

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	LS	BSE	S	PW	OAL	重心 X	扭转刚度	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	MNm/rad	kgm ²	kg
202-8	8000	16000	9600	50	202	145	90	158	127.0	15.5	338	71.8	1.669	0.1354	32.3
228-8	11500	23000	8500	60	228	150	100	174	139.0	17.5	374	83.8	2.307	0.2132	42.1
255-8	15000	30000	7700	70	256	160	115	196	155.0	20.5	426	99.6	2.943	0.3761	57.2
278-8	20000	40000	7000	80	278	180	125	218	175.6	21.2	468	106.4	3.740	0.5871	74.3
302-8	30000	60000	6400	90	302	180	135	234	185.2	24.4	504	121.8	4.606	0.8000	84.8
325-8	37000	74000	6000	100	325	225	145	254	202.0	26.0	544	119.7	5.508	1.3275	120.7
345-8	46000	92000	5500	110	345	245	155	270	213.6	28.2	580	127.3	6.780	1.8501	148.7
380-8	63000	126000	5100	120	380	254	170	296	232.0	32.0	636	144.9	10.626	2.7756	186.8
410-8	86000	172000	4700	130	410	280	185	320	253.6	33.2	690	157.4	14.552	4.3320	250.6
440-8	110000	220000	4350	140	440	300	195	334	261.2	36.4	724	168.5	16.524	6.2428	311.2
475-8	138000	276000	4200	150	475	330	210	358	281.6	38.2	778	178.4	21.711	9.3455	396.7
505-8	175000	350000	3800	160	505	355	230	394	310.0	42.0	854	193.8	25.487	13.0397	493.4
540-8	220000	440000	3600	165	540	380	240	416	324.0	46.0	896	202.8	34.188	18.3744	624.6
570-8	259000	518000	3400	175	570	400	250	450	346.8	51.6	950	216.0	+	24.8152	726.3
605-8	315000	630000	3200	185	605	420	265	474	367.6	53.2	1004	230.6	+	33.4966	867.5
635-8	383000	766000	3100	190	635	440	280	521	399.4	60.8	1081	248.0	+	44.1566	1043.9
675-8	454000	908000	2900	200	675	470	300	558	427.6	65.2	1158	264.8	+	62.1119	1285.4
700-8	528000	1056000	2800	210	700	490	315	595	457.4	68.8	1225	279.8	+	77.3719	1484.8
730-8	608000	1216000	2700	220	730	520	330	610	467.6	71.2	1270	289.3	+	95.9523	1697.2
760-8	700000	1400000	2600	230	760	540	350	642	496.4	72.8	1342	306.9	+	120.2636	1961.3
810-8	885000	1770000	2400	250	810	570	365	665	511.4	76.8	1395	324.5	+	160.3404	2298.4
875-8	1161000	2322000	2200	270	875	620	390	712	540.8	85.6	1492	344.2	+	231.8815	2858.7
935-8	1460000	2920000	2000	290	935	660	410	746	566.8	89.6	1566	363.8	+	316.6274	3435.6
1000-8	1836000	3672000	1800	315	1000	720	450	817	628.2	94.4	1717	392.2	+	452.0270	4288.5
1060-8	2271000	4542000	1500	340	1060	770	490	880	681.6	99.2	1860	423.6	+	621.8516	5211.4

• 表中所列扭转刚度为标准尺寸时整套产品扭转刚度，如轴毂长度LS及中间段长度S发生变化，整体扭转刚度需重新计算，其中膜片扭转刚度参见第12页，中间段扭转刚度参见第22页。

+ 请咨询乐兆传动。