


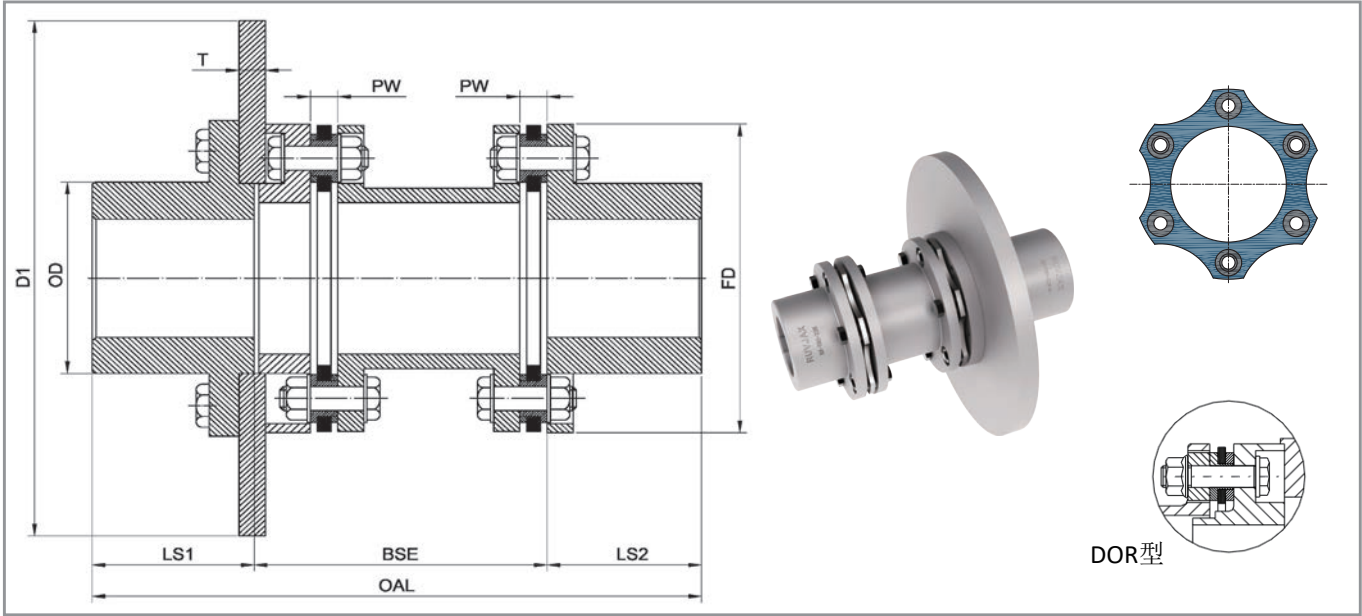

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	D1	T	LS1	LS2	BSE	PW	OAL	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgm ²	kg
90-6	300	600	5000	42	90	58	215	12.7	60	40	79.2	7.5	179.2	0.0232	5.9
110-6	650	1300	5000	50	110	70	215 315	12.7 12.7	70	50	103.7	8.4	223.7	0.0271 0.1026	7.9 12.1
132-6	1500	3000	3500 3100	65	132	90	315 355	30 30	85	60	105.0	8.4	250.0	0.2414 0.3809	24.3 29.3
158-6	2000	4000	3500 3100 2800	75	158	104	315 355 395	30 30 30	110	70	131.0	11.2	311.0	0.2622 0.4017 0.5974	29.7 34.6 40.2
185-6	4000	8000	2800 2500 2200	87	185	121	395 445 495	30 30 30	110	80	148.0	14.0	338.0	0.6382 0.9820 1.4634	46.9 54.7 63.4
202-6	5000	10000	2500 2200 2000	95	202	132	445 495 550	30 30 30	140	90	170.0	15.5	400.0	1.0314 1.5128 2.2404	62.2 70.8 81.5
228-6	8000	16000	2200 2000 1800	107	228	150	495 550 625	30 30 30	170	100	187.0	17.5	457.0	1.6255 2.3531 3.7653	84.5 95.1 111.4
255-6	12500	25000	1800 1600	117	256	165	625 705	30 30	170	115	241.0	20.5	526.0	3.9583 6.1419	129.1 148.7
278-6	14200	28400	1800 1600 1400	131	278	188	625 705 795	30 30 30	210	125	263.0	21.2	598.0	4.2178 6.4014 9.9254	149.6 169.3 194.3
302-6	20000	40000	1600 1400	145	302	205	705 795	30 30	210	135	282.3	24.4	627.3	6.7360 10.2600	187.0 212.0
325-6	25000	50000	1600 1400 1100	156	325	225	705 795 995	30 30 40	250	145	302.0 302.0 307.0	26.0	697.0 697.0 702.0	7.2284 10.7524 31.7084	215.2 240.2 364.2
345-6	31000	62000	1400 1100	165	345	238	795 995	30 40	250	155	321.0 326.0	28.2	726.0 731.0	11.2743 32.2238	263.9 387.5
380-6	42300	84600	1400 1100	178	380	260	795 995	30 40	290	170	353.0 358.0	32.0	813.0 818.0	12.6137 33.5500	321.8 444.7
410-6	57100	114200	1400 1100	192	410	280	795 995	30 40	290	185	382.0 387.0	33.2	857.0 862.0	14.2622 35.1827	380.2 502.5
440-6	73500	147000	1100	200	440	292	995	40	340	195	402.0	36.4	937.0	37.5369	578.1
475-6	92000	184000	1100	220	475	323	995	40	340	210	430.0	38.2	980.0	40.7560	659.2
505-6	117000	234000	1100	230	505	345	995	40	400	230	472.5	42.0	1102.5	45.2082	775.3
540-6	145000	290000	1000	240	540	370	1000	40	400	240	505.0	46.0	1145.0	52.3266	918.5
570-6	175000	350000	1000	250	570	390	1000	40	460	250	543.0	51.6	1253.0	60.1452	1088.0
605-6	210000	420000	900	270	605	410	1200	40	460	265	578.0	53.2	1303.0	102.6451	1333.1
635-6	248000	496000	900	280	635	430	1200	40	460	280	621.6	60.8	1361.6	113.9825	1519.6
675-6	306000	612000	800	290	675	460	1300	40	500	300	655.0	65.2	1455.0	158.5701	1890.7
700-6	349000	698000	800	300	700	480	1400	40	500	315	707.6	68.8	1522.6	205.9048	2173.2
730-6	413000	826000	700	315	730	510	1500	40	500	330	742.4	71.2	1572.4	263.9982	2474.2
760-6	473000	946000	700	330	760	530	1600	40	500	350	780.6	72.8	1630.6	335.4219	2806.8

• SX-TBD型设计用于需要制动的场所，扭转刚度请咨询乐兆传动。