


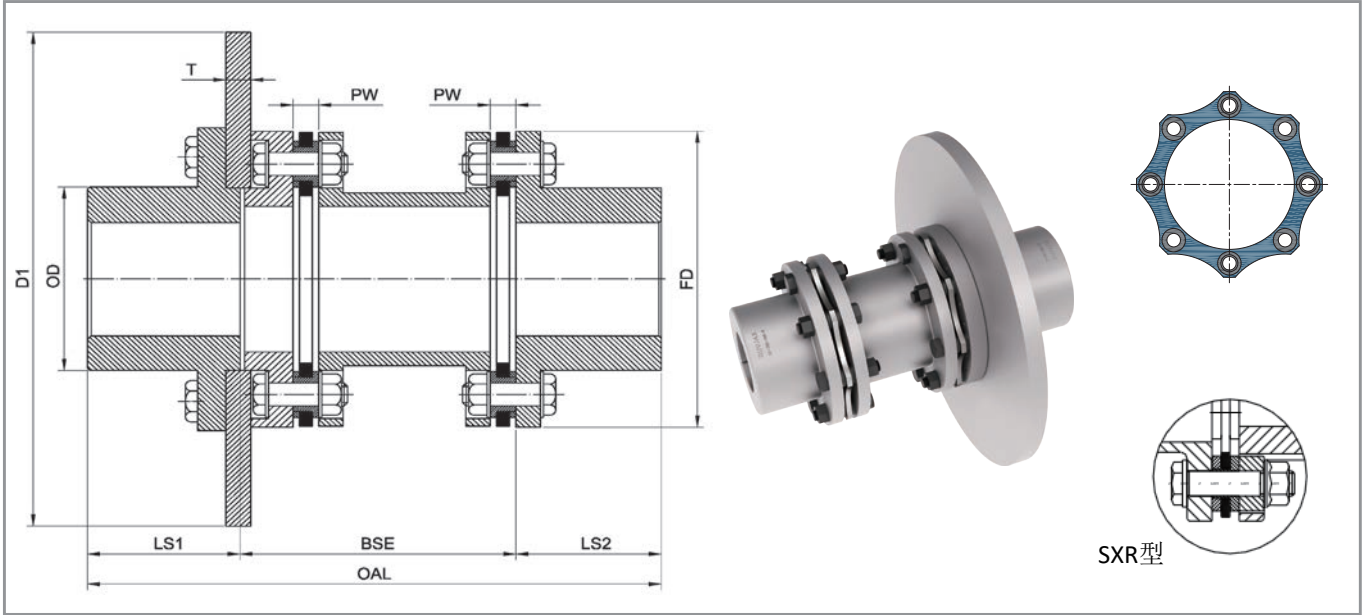

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	D1	T	LS1	LS2	BSE	PW	OAL	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgm ²	kg
202-8	8000	16000	2500	95	202	132	445	30	140	90	170.0	15.5	400.0	1.0279	62.5
			2200				495	30						1.5093	71.0
			2000				550	30						2.2369	81.8
228-8	11500	23000	2200	107	228	150	495	30	170	100	187.0	17.5	457.0	1.6182	85.2
			2000				550	30						2.3458	95.7
			1800				625	30						3.7580	111.9
255-8	15000	30000	1800	117	256	165	625	30	170	115	241.0	20.5	526.0	3.9537	129.5
			1600				705	30						6.1373	149.1
278-8	20000	40000	1800	131	278	188	625	30	210	125	263.0	21.2	598.0	4.1954	150.2
			1600				705	30						6.3790	171.3
			1400				795	30						9.9030	196.5
302-8	30000	60000	1600	145	302	205	705	30	210	135	282.3	24.4	627.3	6.7030	188.4
			1400				795	30						10.2271	223.5
325-8	37000	74000	1600	156	325	225	705	30	250	145	302.0	26.0	697.0	7.1908	216.6
			1400				795	30			302.0		697.0	10.7148	245.3
			1100				995	40			307.0		702.0	31.6686	365.8
345-8	46000	92000	1400	165	345	238	795	30	250	155	321.0	28.2	726.0	11.2259	265.8
			1100				995	40			326.0		731.0	32.1727	389.6
380-8	63000	126000	1400	178	380	260	795	30	290	170	353.0	32.0	813.0	12.5172	324.2
			1100				995	40			358.0		818.0	33.4490	446.7
410-8	86000	172000	1400	192	410	280	795	30	290	185	382.0	33.2	857.0	14.1179	385.4
			1100				995	40			387.0		862.0	35.0322	507.3
440-8	110000	220000	1100	200	440	292	995	40	340	195	402.0	36.4	937.0	37.2509	586.5
475-8	138000	276000	1100	220	475	323	995	40	340	210	430.0	38.2	980.0	40.4100	667.6
505-8	175000	350000	1100	230	505	345	995	40	400	230	472.5	42.0	1102.5	44.7764	785.8
540-8	220000	440000	1000	240	540	370	1000	40	400	240	505.0	46.0	1145.0	51.5446	936.4
570-8	259000	518000	1000	250	570	390	1000	40	460	250	543.0	51.6	1253.0	59.1523	1097.8
605-8	315000	630000	900	270	605	410	1200	40	460	265	578.0	53.2	1303.0	101.4419	1346.7
635-8	383000	766000	900	280	635	430	1200	40	460	280	621.6	60.8	1361.6	112.3789	1537.2
675-8	454000	908000	800	290	675	460	1300	40	500	300	655.0	65.2	1455.0	156.2714	1901.5
700-8	528000	1056000	800	300	700	480	1400	40	500	315	707.6	68.8	1522.6	203.1763	2184.3
730-8	608000	1216000	700	315	730	500	1500	40	500	330	742.4	71.2	1572.4	260.8514	2487.2
760-8	700000	1400000	700	330	760	520	1600	40	500	350	780.6	72.8	1630.6	327.4359	2810.7
810-8	885000	1770000	650	350	810	550	1600	40	550	365	800.0	76.8	1715.0	371.8770	3209.6
875-8	1161000	2322000	650	375	875	600	1800	45	550	390	830.0	85.6	1770.0	603.2509	4011.3
935-8	1460000	2920000	600	400	935	640	1800	45	600	410	890.0	89.6	1900.0	698.3022	4698.4
1000-8	1836000	3672000	550	430	1000	690	2000	45	600	450	950.0	94.4	2000.0	1010.9542	5627.2
1060-8	2271000	4542000	500	460	1060	740	2000	45	600	490	1000.0	99.2	2090.0	1172.9963	6456.9

• SX-TBD型设计用于需要制动的场所，扭转刚度请咨询乐兆传动。