


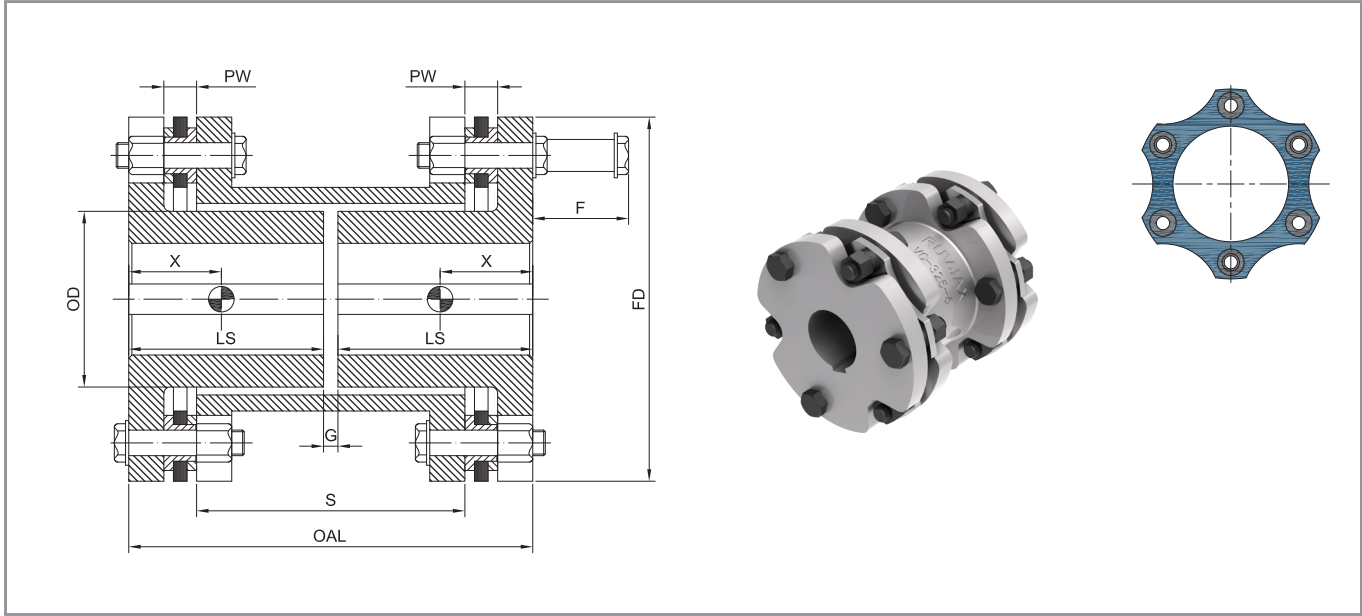

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	LS	G	S	PW	OAL	F	重心 X	扭转刚度	转动惯量J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	MNm/rad	kgm ²	kg
202-6	5000	25000	7090	65	202	105	105	8	127.0	18.7	218	100	41.7	0.883	0.1083	27.2
228-6	8000	40000	6280	70	228	116	115	8	139.0	21.5	238	115	46.5	1.262	0.2001	40.0
255-6	12500	62500	5620	80	256	128	135	8	162.0	25.0	278	135	54.9	1.526	0.3544	56.7
278-6	14200	71000	5150	90	278	146	145	10	175.6	26.2	300	135	58.4	2.398	0.5394	73.0
302-6	20000	100000	4740	95	302	155	155	10	185.2	29.2	320	150	63.2	2.587	0.8019	93.2
325-6	25000	125000	4410	108	325	177	165	10	202.0	30.8	340	150	67.5	4.903	1.1537	114.9
345-6	31000	155000	4150	112	345	182	175	10	213.6	33.5	360	165	72.2	5.649	1.5442	136.7
380-6	42300	211500	3770	120	380	198	195	12	232.0	38.0	402	180	67.0	10.128	2.2711	152.9
410-6	57100	285500	3490	120	410	198	210	12	253.6	40.7	432	202	87.0	6.998	3.7358	236.7
440-6	73500	367500	3260	125	440	205	225	12	273.2	44.5	462	235	96.0	7.865	5.5885	304.6
475-6	92000	460000	3020	135	475	241	240	12	281.6	47.7	492	238	101.0	10.469	8.0951	386.9
505-6	117000	585000	2840	145	505	258	265	16	310.0	52.0	546	245	110.4	12.285	11.3841	483.3
540-6	145000	725000	2650	155	540	288	275	25	334.0	58.0	575	270	118.8	15.274	16.6793	610.7
570-6	175000	787500	2510	165	570	320	285	45	346.8	64.6	615	275	124.9	18.942	21.7628	724.5
605-6	210000	945000	2370	170	605	333	305	45	367.6	66.2	655	292	132.3	20.744	29.1981	861.3
635-6	248000	1116000	2260	180	635	342	320	70	399.4	74.8	710	300	140.1	24.594	35.7424	972.6
675-6	306000	1377000	2120	190	675	365	345	70	427.6	80.2	760	320	150.6	28.565	49.6462	1192.7
700-6	349000	1396000	2050	185	700	369	360	80	457.4	83.8	800	345	160.3	+	62.4932	1400.0
730-6	413000	1652000	1960	200	730	385	380	80	467.6	86.2	840	355	166.1	+	74.6868	1560.5
760-6	473000	1892000	1880	210	760	415	400	90	496.4	87.8	890	368	175.3	+	94.6735	1805.8

• 膜片扭矩刚度参见第13页，中间段扭转刚度参见第24页，整体扭转刚度可通过计算得到，也可咨询乐兆传动。

+ 请咨询乐兆传动。