


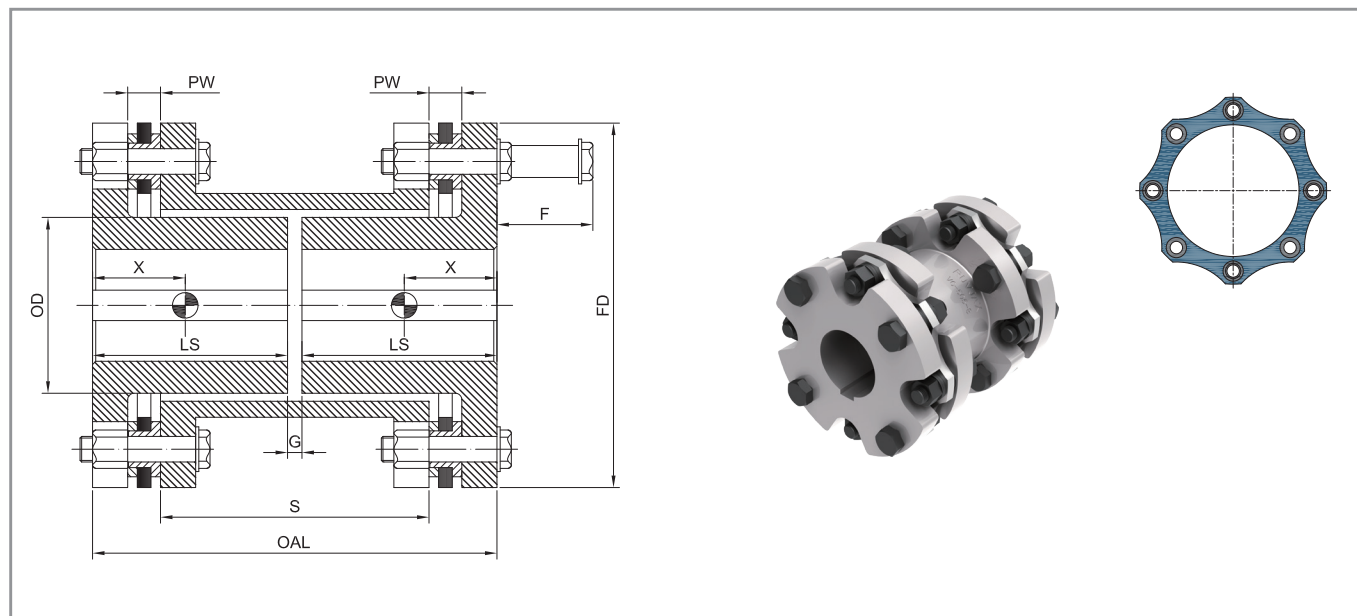

规格	额定扭矩	最大扭矩	最大转速	最大开孔	FD	OD	LS	G	S	PW	OAL	F	重心 X	扭转刚度	转动惯量J	重量
	N.m	N.m	RPM	mm												
202-8	8000	40000	9600	63	202	101	105	8	127.0	18.7	218	100	42.3	1.061	0.1019	26.4
228-8	11500	57500	8500	68	228	114	115	8	139.0	21.5	238	115	47.1	1.371	0.1890	39.0
255-8	15000	75000	7700	80	256	128	135	8	162.0	25.0	278	135	55.4	2.021	0.3277	54.3
278-8	20000	100000	7000	91	278	148	145	10	175.6	26.2	300	135	58.8	2.858	0.5075	70.5
302-8	30000	150000	6400	94	302	154	155	10	185.2	29.2	320	150	63.9	3.228	0.7482	90.2
325-8	37000	185000	6000	107	325	176	165	10	202.0	30.8	340	150	68.1	4.496	1.0905	112.0
345-8	46000	230000	5500	112	345	182	175	10	213.6	33.5	360	165	72.8	5.276	1.4479	132.3
380-8	63000	315000	5100	120	380	199	195	12	232.0	38.0	402	180	81.0	7.173	2.3381	175.5
410-8	86000	430000	4700	120	410	198	210	12	253.6	40.7	432	205	87.8	7.625	3.5147	228.4
440-8	110000	550000	4350	125	440	205	225	12	273.2	44.5	462	235	97.0	8.486	5.2066	291.3
475-8	138000	690000	4200	135	475	241	240	12	281.6	47.7	492	240	101.9	11.126	7.6385	373.0
505-8	175000	875000	3800	142	505	252	265	16	310.0	52.0	546	270	112.9	12.553	11.0289	474.3
540-8	220000	1100000	3600	148	540	273	275	25	334.0	58.0	575	290	121.0	15.107	15.4588	584.5
570-8	259000	1165500	3400	150	570	287	285	45	346.8	64.6	615	310	128.0	+	19.3215	685.0
605-8	315000	1417500	3200	162	605	309	305	45	367.6	66.2	655	315	133.7	+	26.1286	811.9
635-8	383000	1723500	3100	170	635	316	320	70	399.4	74.8	710	340	144.3	+	35.0097	974.8
675-8	454000	2043000	2900	180	675	344	345	70	427.6	80.2	760	355	153.4	+	48.2179	1189.0
700-8	528000	2112000	2800	185	700	369	360	80	457.4	83.8	800	370	162.6	+	60.3765	1388.7
730-8	608000	2432000	2700	194	730	378	380	80	467.6	86.2	840	390	169.1	+	73.2841	1559.0
760-8	700000	2800000	2600	205	760	407	400	90	496.4	87.8	890	405	177.6	+	93.1834	1822.8

• 膜片扭矩刚度参见第13页，中间段扭转刚度参见第24页，整体扭转刚度可通过计算得到，也可咨询乐兆传动。

+ 请咨询乐兆传动。