


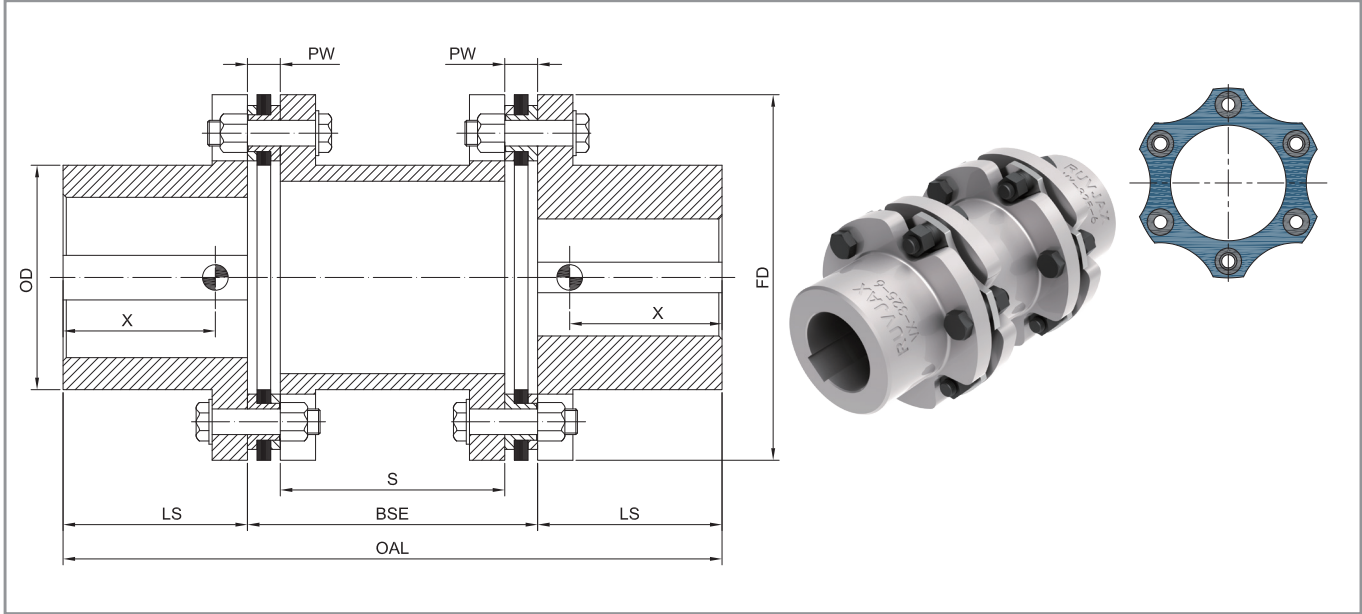

规格	额定 扭矩	最大 扭矩	最大 转速	最大 开	FD	OD	LS	中间段每米			BSE	S	PW	OAL	重心 X	扭转 刚度	转动 惯量 J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	质量	扭转 刚度	转动 惯量	mm	mm	mm	mm	mm	MNm /rad	kgm ²	kg
	N.m	N.m	RPM	mm	mm	mm	mm	kg	MNm /rad	kgm ²	mm	mm	mm	mm	mm	MNm /rad	kgm ²	kg
202-6	5000	25000	7090	90	202	125	105	23.08	0.809	0.0797	164.4	127.0	18.7	374.4	96.4	1.259	0.1308	26.9
228-6	8000	40000	6280	103	228	141	115	33.79	1.476	0.1448	182.0	139.0	21.5	412.0	108.2	2.047	0.2442	39.1
255-6	12500	62500	5620	113	256	156	135	42.62	2.267	0.2225	212.0	162.0	25.0	482.0	126.6	2.190	0.4322	56.3
278-6	14200	71000	5150	125	278	176	145	52.26	3.560	0.3493	228.0	175.6	26.2	518.0	133.1	3.484	0.6679	73.2
302-6	20000	100000	4740	137	302	190	155	66.70	5.216	0.5118	243.6	185.2	29.2	553.6	144.8	3.737	0.9961	92.7
325-6	25000	125000	4410	150	325	212	165	75.11	7.435	0.7296	263.6	202.0	30.8	593.6	150.2	7.530	1.4417	115.0
345-6	31000	155000	4150	162	345	222	175	90.56	9.676	0.9495	280.6	213.6	33.5	630.6	163.4	9.285	1.9083	134.8
380-6	42300	211500	3770	170	380	244	195	115.49	14.762	1.4485	308.0	232.0	38.0	698.0	179.3	11.399	3.1346	187.7
410-6	57100	285500	3490	180	410	258	210	158.82	21.723	2.1315	335.0	253.6	40.7	755.0	199.0	13.584	4.7387	246.1
440-6	73500	367500	3260	195	440	275	225	196.95	29.932	2.9371	362.2	273.2	44.5	812.2	218.0	16.307	7.0357	314.1
475-6	92000	460000	3020	210	475	308	240	214.80	42.381	4.1587	377.0	281.6	47.7	857.0	223.6	22.236	10.3886	395.5
505-6	117000	585000	2840	225	505	332	265	253.12	57.844	5.6760	414.0	310.0	52.0	944.0	245.5	25.400	14.8553	500.0
540-6	145000	725000	2650	235	540	363	275	283.11	78.485	7.7013	450.0	334.0	58.0	1000.0	252.6	30.376	21.7377	634.3
570-6	175000	787500	2510	245	570	395	285	310.73	103.572	10.1630	476.0	346.8	64.6	1046.0	256.4	36.853	28.9591	758.0
605-6	210000	945000	2370	270	605	415	305	357.47	130.453	12.8007	500.0	367.6	66.2	1110.0	277.8	44.794	38.1876	878.1
635-6	248000	1116000	2260	283	635	430	320	397.61	154.642	15.1743	549.0	399.4	74.8	1189.0	297.5	52.144	47.2183	998.8
675-6	306000	1377000	2120	290	675	460	345	478.70	210.725	20.6774	588.0	427.6	80.2	1278.0	317.7	59.899	66.7128	1264.0
700-6	349000	1396000	2050	300	700	480	360	558.11	263.257	25.8320	625.0	457.4	83.8	1345.0	335.6	+	84.4677	1484.0
730-6	413000	1652000	1960	310	730	500	380	603.59	309.177	30.3380	640.0	467.6	86.2	1400.0	349.9	+	102.8103	1680.0
760-6	473000	1892000	1880	330	760	530	400	644.28	375.325	36.8288	672.0	496.4	87.8	1472.0	363.9	+	129.2696	1915.0

• 膜片扭矩刚度参见第13页，中间段扭转刚度参见第24页，整体扭转刚度可通过计算得到，也可咨询乐兆传动。
+ 请咨询乐兆传动。