


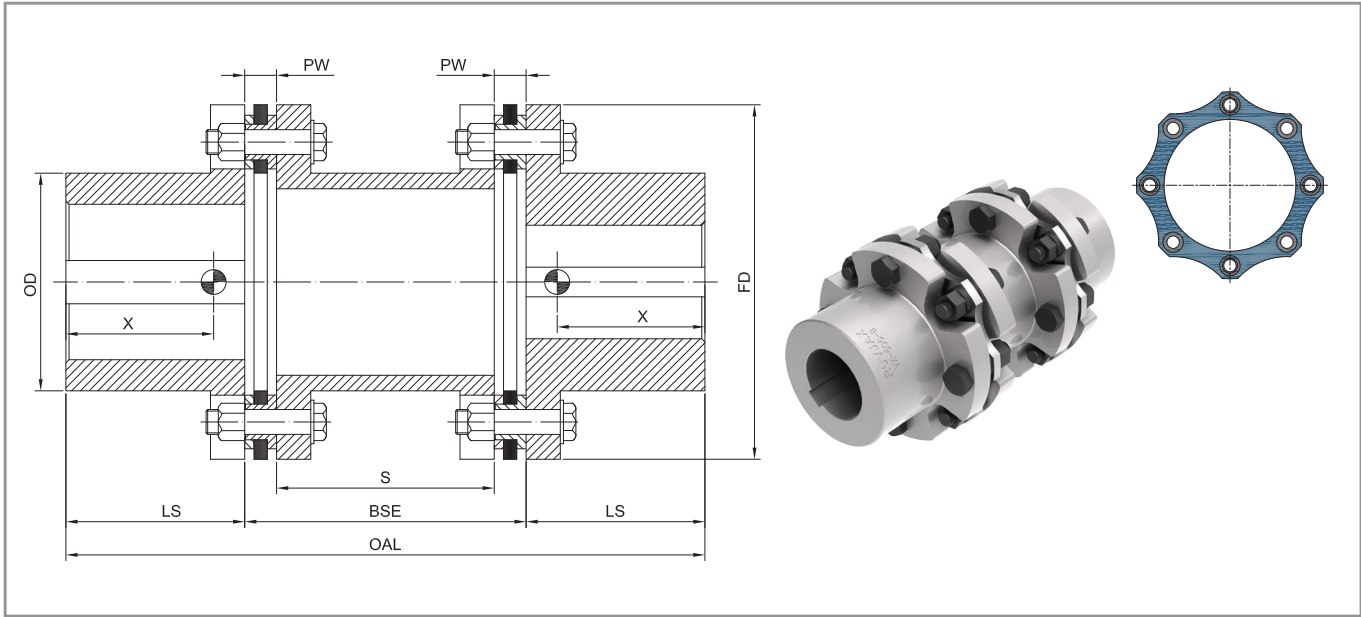

规格	额定 扭矩	最大 扭矩	最大 转速	最大 开孔	FD	OD	LS	中间段每米			BSE	S	PW	OAL	重心 X	扭转 刚度	转动 惯量 J	重量
	N.m	N.m	RPM	mm	mm	mm	mm	质量	扭转 刚度	转动 惯量	mm	mm	mm	mm	mm	MNm /rad	kgm ²	kg
	N.m	N.m	RPM	mm	mm	mm	mm	kg	MNm /rad	kgm ²	mm	mm	mm	mm	mm	MNm /rad	kgm ²	kg
202-8	8000	40000	9600	90	202	125	105	28.36	0.963	0.0945	164.4	127.0	18.7	374.4	97.3	1.897	0.1266	29.2
228-8	11500	57500	8500	103	228	141	115	36.73	1.582	0.1552	182.0	139.0	21.5	412.0	108.3	2.681	0.2351	42.1
255-8	15000	75000	7700	113	256	156	135	42.62	2.267	0.2225	212.0	162.0	25.0	482.0	125.7	3.377	0.4068	59.4
278-8	20000	100000	7000	125	278	176	145	48.53	3.344	0.3281	228.0	175.6	26.2	518.0	131.6	4.363	0.6345	77.3
302-8	30000	150000	6400	137	302	190	155	68.66	5.341	0.5241	243.6	185.2	29.2	553.6	144.3	5.454	0.9477	98.8
325-8	37000	185000	6000	150	325	212	165	77.34	7.620	0.7477	263.6	202.0	30.8	593.6	149.7	3.797	1.3883	123.5
345-8	46000	230000	5500	162	345	222	175	90.56	9.677	0.9495	280.6	213.6	33.5	630.6	162.4	8.320	1.8185	143.5
380-8	63000	315000	5100	170	380	244	195	112.99	14.502	1.4229	308.0	232.0	38.0	698.0	177.3	12.305	2.9511	196.9
410-8	86000	430000	4700	180	410	258	210	158.82	21.724	2.1315	335.0	253.6	40.7	755.0	197.9	16.165	4.4962	261.5
440-8	110000	550000	4350	195	440	275	225	196.95	29.934	2.9371	362.2	273.2	44.5	812.2	216.7	19.225	6.5934	330.9
475-8	138000	690000	4200	210	475	308	240	214.80	42.384	4.1587	377.0	281.6	47.7	857.0	222.2	25.425	9.8422	419.9
505-8	175000	875000	3800	222	505	326	265	248.01	54.448	5.3424	414.0	310.0	52.0	944.0	246.8	29.663	14.2366	536.2
540-8	220000	1100000	3600	232	540	352	275	287.43	73.670	7.2284	450.0	334.0	58.0	1000.0	256.4	38.914	20.0988	665.2
570-8	259000	1165500	3400	240	570	370	285	318.36	90.104	8.8409	476.0	346.8	64.6	1046.0	267.0	+	25.7642	778.3
605-8	315000	1417500	3200	250	605	396	305	358.95	116.797	11.4600	500.0	367.6	66.2	1110.0	283.6	+	35.0189	940.2
635-8	383000	1723500	3100	265	635	415	320	426.55	149.581	14.6767	549.0	399.4	74.8	1189.0	304.7	+	47.0435	1134.4
675-8	454000	2043000	2900	280	675	445	345	469.95	191.480	18.7878	588.0	427.6	80.2	1278.0	323.7	+	64.9444	1383.4
700-8	528000	2112000	2800	295	700	474	360	522.82	242.813	23.8246	625.0	457.4	83.8	1345.0	335.3	+	82.1626	1605.9
730-8	608000	2432000	2700	303	730	490	380	575.91	283.785	27.8446	640.0	467.6	86.2	1400.0	352.0	+	100.4491	1826.5
760-8	700000	2800000	2600	325	760	520	400	620.58	347.978	34.1432	672.0	496.4	87.8	1472.0	364.1	+	127.9761	2103.3

• 膜片扭矩刚度参见第13页，中间段扭转刚度参见第24页，整体扭转刚度可通过计算得到，也可咨询乐兆传动。
+ 请咨询乐兆传动。