


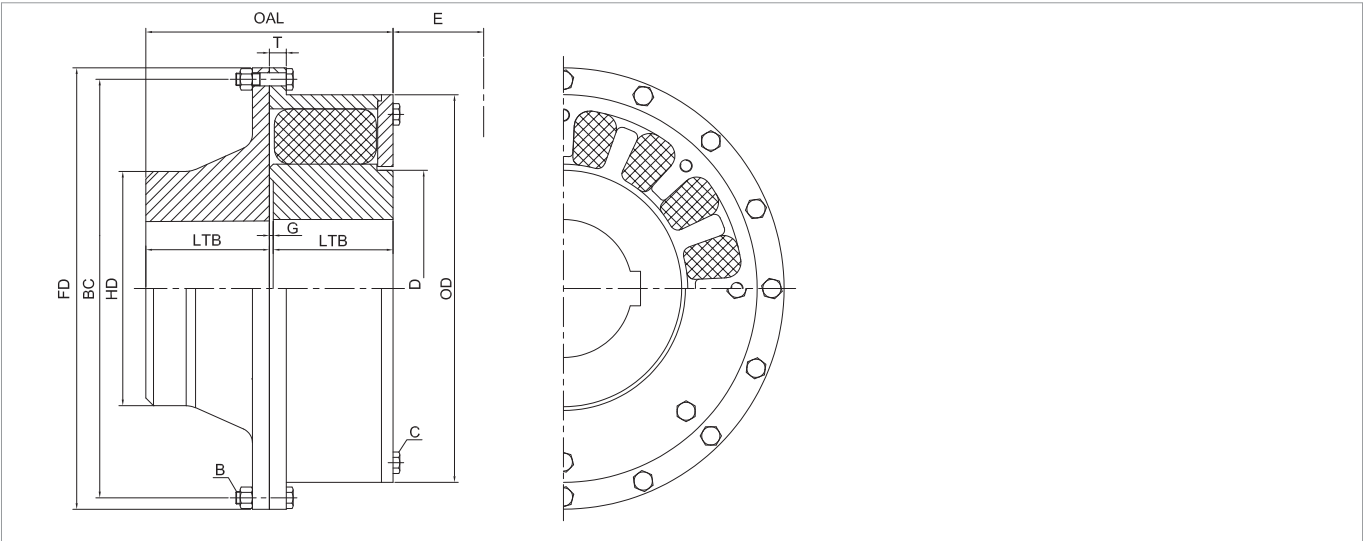

规格	最大 开孔	峰值 扭矩	振动 扭矩	最高 转速	腔 数 量	弹性 体 数量	尺寸										螺栓数量 和规格	螺栓数量 和规格
	mm	Nm*10 ³	Nm*10 ³	rpm			FD	OAL	G	OD	LTB	HD	BC	E*	D	T	B	C
25	76.2	2.8	0.4	4470	12	12	260	143	3	189	70	114	238	73	108	19	12-M10	6-M10
30	88.9	5.2	0.7	3700	12	12	295	181	3	252	89	148	276	92	133	19	12-M10	6-M10
35	108.0	9.9	1.2	3250	12	12	359	220	4	306	108	178	333	130	146	19	12-M12	6-M12
40	127.0	14.4	1.8	2700	12	12	416	245	4	375	121	206	391	130	203	19	12-M12	6-M12
45	133.4	23.7	2.9	2660	12	12	438	256	5	384	125	216	413	178	203	19	12-M12	6-M12
55	174.6	37.3	4.6	2210	14	14	527	289	19	457	141	254	495	178	267	22	14-M16	7-M16
60	200.0	56.5	7.0	2030	16	16	575	318	19	505	156	305	543	203	308	22	16-M16	8-M16
65	215.9	84.8	10.6	1840	16	32	632	394	19	549	194	313	594	254	333	29	16-M20	8-M20
70	231.8	114.1	14.2	1710	16	32	683	438	13	587	213	356	638	159	359	29	16-M22	8-M20
80	273.1	152.6	19.2	1560	18	36	746	457	13	651	222	375	702	165	422	29	18-M22	9-M20
90	285.8	187.6	23.7	1470	18	36	791	508	13	679	248	406	740	184	445	29	18-M24	9-M20
100	333.4	273.5	33.9	1320	20	40	883	546	13	775	267	456	832	197	521	29	20-M24	10-M22
110	381.0	378.6	47.5	1200	20	40	972	648	13	854	318	508	914	232	594	37	20-M27	10-M22
120	406.4	583.1	72.9	1100	22	44	1060	762	13	927	375	578	997	273	641	38	22-M32	11-M24
140	447.7	813.6	101.7	1020	24	48	1137	832	19	1003	406	641	1073	302	705	38	24-M32	12-M24
160	539.8	1073.5	134.5	880	24	72	1327	870	19	1168	425	732	1251	314	851	51	24-M36	12-M27
190	635.0	1932.3	241.8	750	28	84	1556	1035	19	1365	508	908	1467	362	1003	57	28-M44	14-M32
220	863.6	3197.9	400.0	580	32	96	2019	1245	25	1778	610	1016	1905	362	1384	70	32-M57	16-M36
250	863.6	4779.9	597.8	580	32	160	2019	1492	44	1778	724	1138	1905	540	1384	70	32-M57	16-M36
280	863.6	6384.5	797.8	580	32	192	2019	1892	114	1778	889	1302	1905	714	1384	70	32-M57	16-M36

规格	转动惯量 kgm ² *10 ⁻³					重量 (不开孔) kg				
	轴毂	弹性块	外套和端盖	刚性轴毂	总和	轴毂	弹性块	外套和端盖	刚性轴毂	总和
25	0.0152	0.0047	0.0806	0.0700	0.1705	5.9	0.7	7.7	11.8	26.1
30	0.0387	0.0114	0.1509	0.1486	0.3495	11.8	1.2	10.9	21.3	45.3
35	0.1014	0.0363	0.3897	0.3252	0.8526	20.9	2.7	19.5	33.6	76.7
40	0.2699	0.0727	0.6710	0.6827	1.6962	36.8	3.6	23.2	54.5	118.0
45	0.2863	0.1263	1.0724	0.7765	2.2614	37.2	5.9	35.0	57.7	135.7
55	0.8292	0.2731	2.4729	1.9719	5.5471	69.5	8.6	55.4	95.3	228.8
60	1.5763	0.4483	3.6977	2.9183	8.6406	101.7	10.9	67.6	125.3	305.5
65	2.7161	0.7940	6.8562	5.3326	15.6989	148.5	17.3	104.9	183.0	453.5
70	4.0463	1.1691	9.4112	7.7147	22.3413	192.5	21.8	125.8	230.2	570.2
80	7.4276	1.7990	12.9477	10.8908	33.0651	269.2	25.9	141.2	285.1	721.4
90	9.9972	2.4348	17.5800	16.0271	46.0391	330.1	31.8	169.8	367.7	899.4
100	19.4259	4.0727	30.4720	25.9598	79.9304	481.2	40.4	231.5	488.1	1241.2
110	37.2403	6.9939	49.7514	45.6494	139.6350	726.4	57.7	305.1	708.2	1797.4
120	61.2370	10.9289	82.0400	72.0780	266.2839	1002.9	73.5	434.0	989.7	2500.2
140	96.9830	17.3163	114.2700	105.4800	334.0493	1329.8	98.1	517.6	1266.7	3212.1
160	207.4440	31.3510	288.8980	221.8010	749.4940	1996.2	127.6	898.9	1847.8	4870.5
190	480.5200	67.3900	659.2500	524.4700	1731.6300	3240.7	199.3	1530.0	3173.5	8143.4
220	1579.2700	181.3670	1951.3800	1567.5500	5279.5670	6142.6	299.2	2528.8	5720.4	14691.0
250	2241.4500	269.5600	2320.5600	1933.8000	6765.3700	8685.0	444.5	3046.3	7218.6	19394.4
280	2930.0000	357.4600	2689.7400	2789.3600	8766.5600	11177.5	590.2	3559.4	10078.8	25405.8